


TOP VIEW

DESIGN DATA	
DESIGN, FAB & STAMP	ASME B & PV CODE
DESIGN PRESSURE	P.S.I.G.
DESIGN TEMPERATURE	Deg F
CORROSION ALLOWANCE	NONE
RADIOGRAPHIC EXAM.	NONE
JOINT EFFICIENCY	85% HEADS & 70% SHELL
TEST PRESSURE	163 P.S.I.G.
MDMT	-20°F
MATERIAL SPECIFICATIONS	
HEADS (2:1 ELLIPTICAL)	
SHELL	SA-516-70
NOZZLE NECKS	SA-106-B
NOZZLE FLANGES	150 # RFSO SA-105
COUPLINGS	SA-105
TANK FLANGES	SA-105/SA-181-70
SUPPORTS	SA-36
MANWAY	SA-675-70 / SA-181-70 (IF REQ'D)

NOTES:
 1) INSPECTION OPENINGS WILL BE INCLUDED AS REQUIRED BY CODE.
 3) RECO USA RESERVES THE RIGHT TO MAKE CHANGES TO OUR PRODUCTS WITHOUT NOTICE.

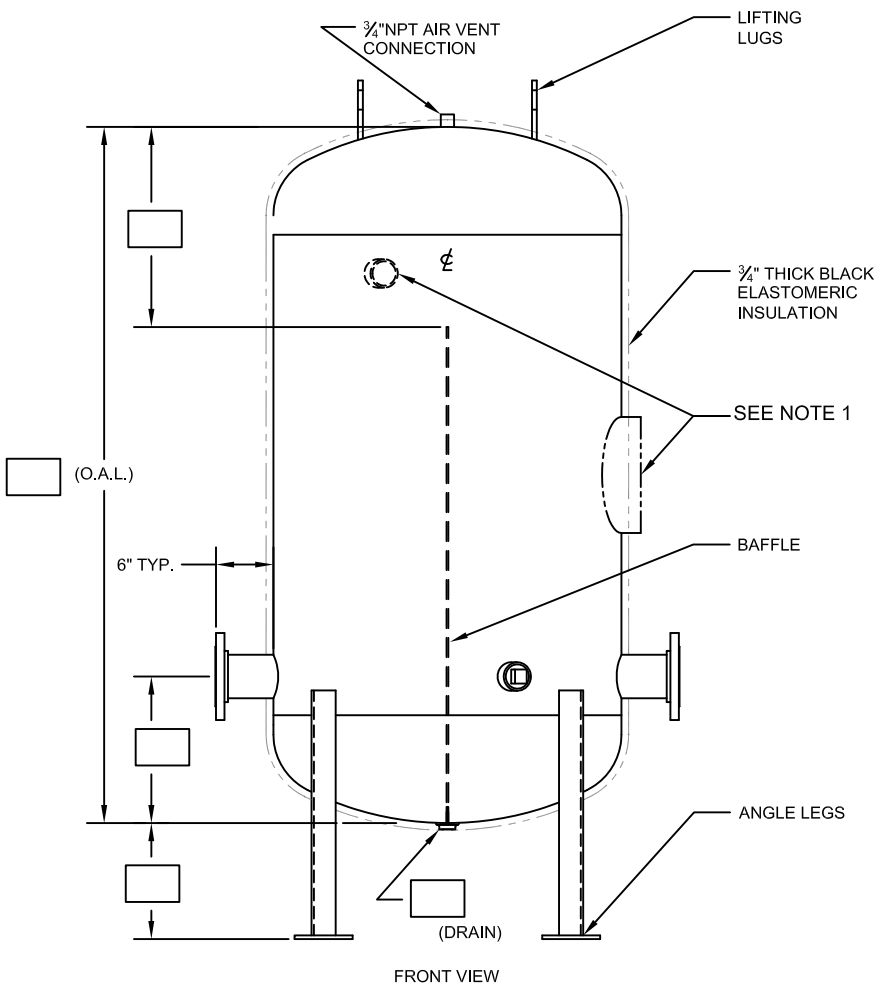

FRONT VIEW

1	ADDED NOTES	KJS	5-7-09
REV.	DESCRIPTION	BY	DATE
DRAWN:	KJS	DATE:	12-15-06
CHECKED:	KJS	DATE:	12-15-06
APPROVED:	KJS	DATE:	12-15-06



TITLE			
VERTICAL CHILLED WATER BUFFER TANK			
JOB NO.	DATE	DWG	REV.
		CWV125_FORM	1